




FEATURES

- S.G. Iron construction
- Simple, rugged construction
- Direct connection to rotary actuator
- Available in 2way (2S) or 3way (3S) Configuration
- 3way valves Suitable for diverting (1 inlet, 2 outlets) or mixing (2 inlets, 1 outlet) application
- Connection size 25mm - standard & low Kv (SL)

TYPE SUMMARY


Type	Dia mm	K _{vs} m ³ /h
_S 25	25	10
_SL 25	25	6



2WAY VALVE

BENEFITS

- Easy operation
- Highly reliable
- Long life
- Economical
- Easy maintenance

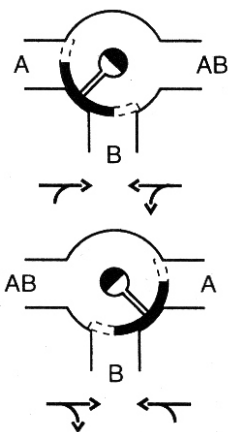

3WAY VALVE

Mixing application
(2 inlet, 1 outlet)

Diverting application
(1 inlet, 2 outlets)

TECHNICAL DATA

Material

Valve body	:	S.G. Iron
Slipper	:	Brass
Spindle	:	Stainless steel
Spindle packing	:	O-ring (nitrile)

Nominal pressure :

PN16

Max. admissible pressure differential :

60 kPa (0.6 bar)

Mounting position :

Horizontal or vertical
(Do not mount with spindle downwards)

Water temperature :

2°C to 110° C

Angle of rotation :

90°

INSTALLATION AND COMMISSIONING

Ensure that the position and rotation of the slipper complies with the hydraulic circuit of the installation.



DIMENSIONS

With screwed connections:



DN	Connection	L	L1	H	Wt.(Kgs)
25	1" BSP	96	48	52	1

NOTES:

- Dimensions in mm and weight in kgs including packaging (without actuator)
- L1*: Dimension for 3way valves only.

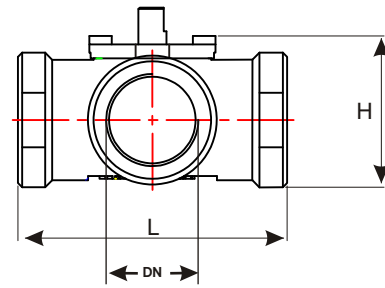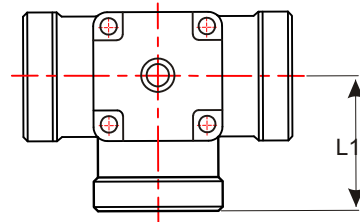

3way valve

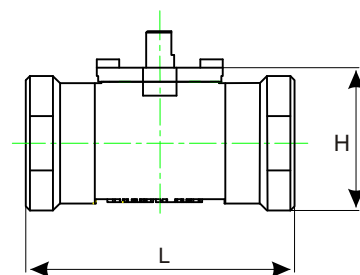

2way valve